

End Fed Antennas for Portable, Emergency & Stealth Installations




Bob Brehm, AK6R
Chief Engineer
Palomar-Engineers.com

South Bay ARC Online - March 2021
This presentation available on website
Copyright 2013-2021 Palomar Engineers, Inc.

End Fed Workshop Topics



- Short overview of antenna feed points
- Popular End Fed Antennas
- How to choose an End Fed Antenna that fits your needs
- Secrets of Non-Resonant End Fed Antennas
- Typical Configurations that work all the time
- Feed Line Chokes, Counterpoises and Coax Noise Filters
- Solving End Fed Antenna RFI Problems
- Q & A

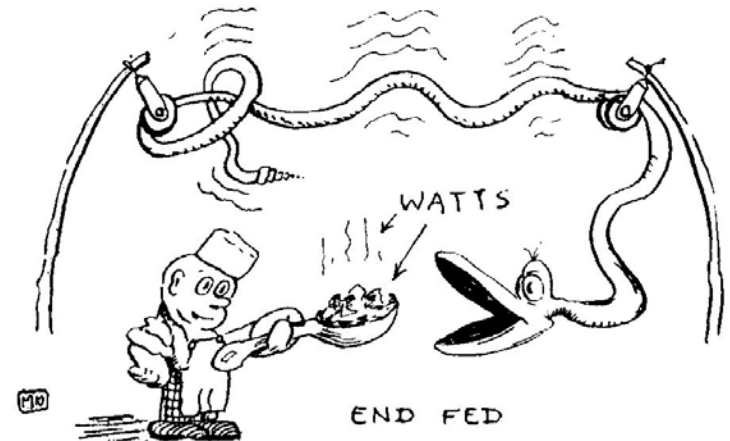

Thinking cap time.....

Antenna Feed Options



CENTER FED

OFF-CENTER FED

END FED


Dipole Concepts

- Total Length is $\frac{1}{2}$ wavelength = $468/F(\text{MHz})$
 - Center Fed (50%/50%), $Z=25-100\Omega$
 - Off Center Fed (66/34%, 80/20%), $Z=200-300\Omega$
- Feed Point Impedance = $F(\text{height above RF ground, offset})$

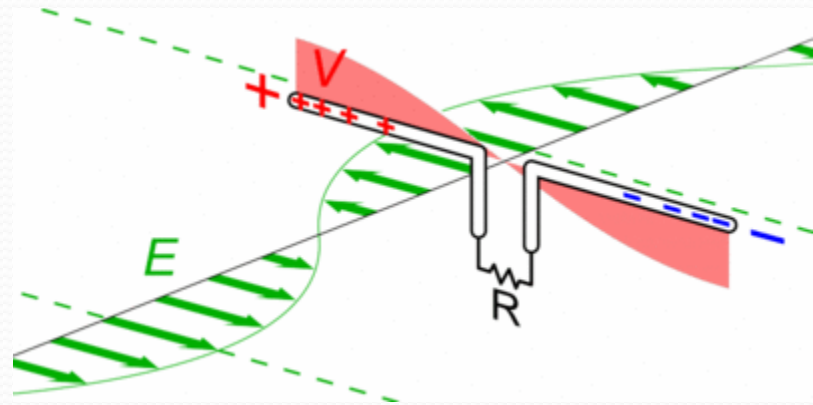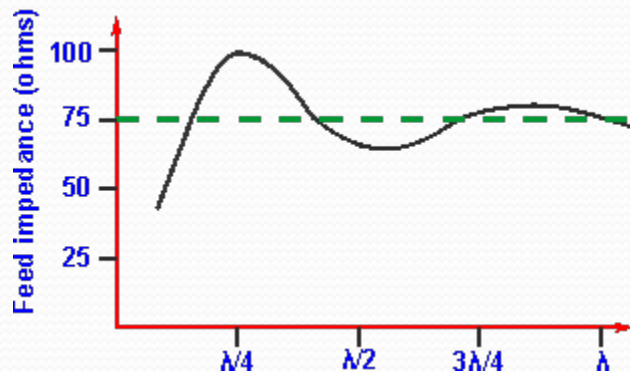


Dipole Examples

- Horizontal Half Wave

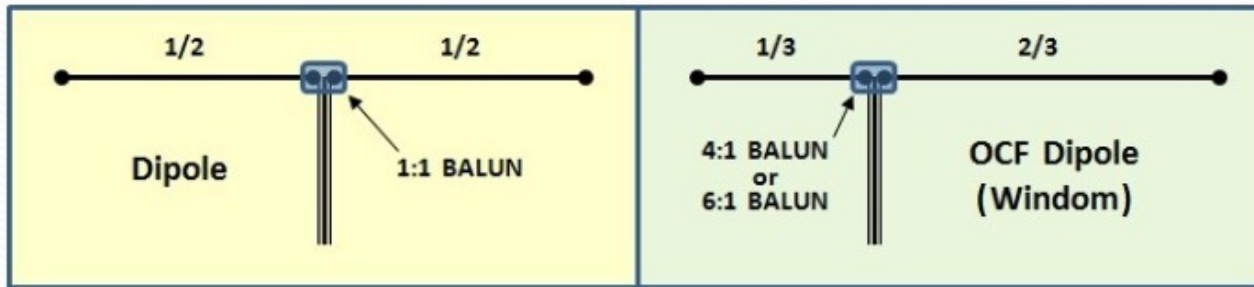


DJoIP Image





62' – 40 meters only-offset for 50Ω

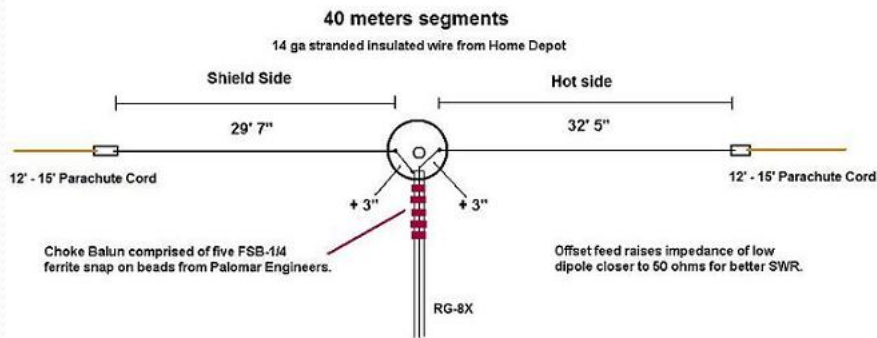

66' – 75/20 meters (traps)

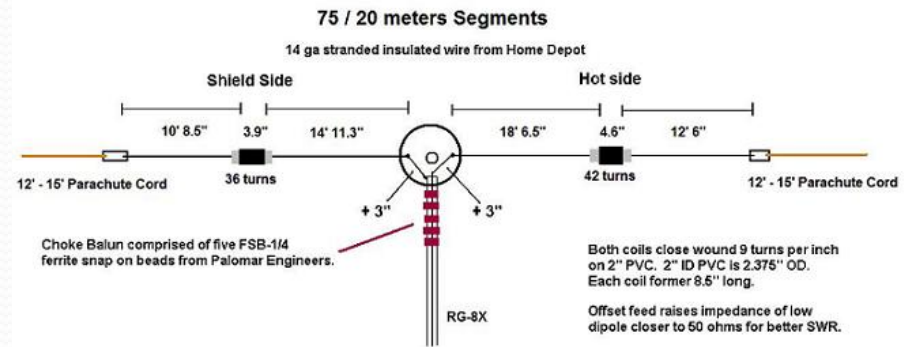

Vertical Half Wave Dipoles

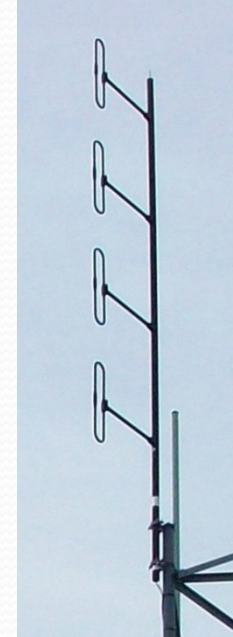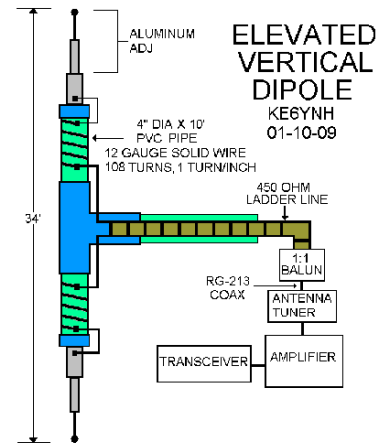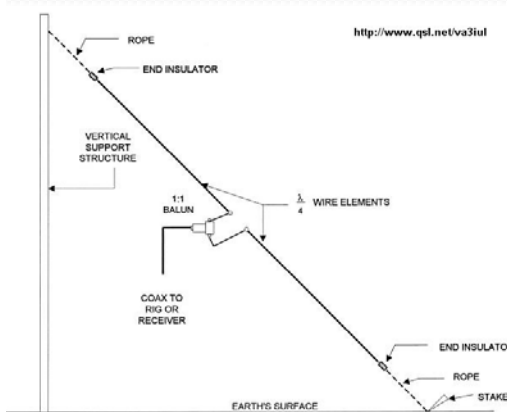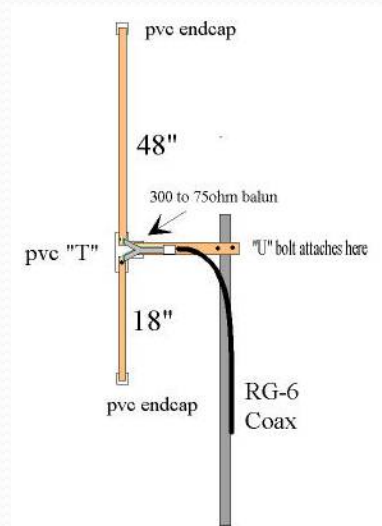

Off-Center Fed, sloper, center fed, phased


End Feds

End Fed Antenna Types

- End Fed Zepp (aka J-Pole)
 - End Fed Half Wave
- Non-Resonate End Fed

End Fed Half Wave (Zepp)

- Pros
 - Low loss
- Cons
 - Ladder line match
 - Single band w/o antenna tuner
 - High and long
 - Needs feed line choke at coax feed point to prevent coax braid from radiating

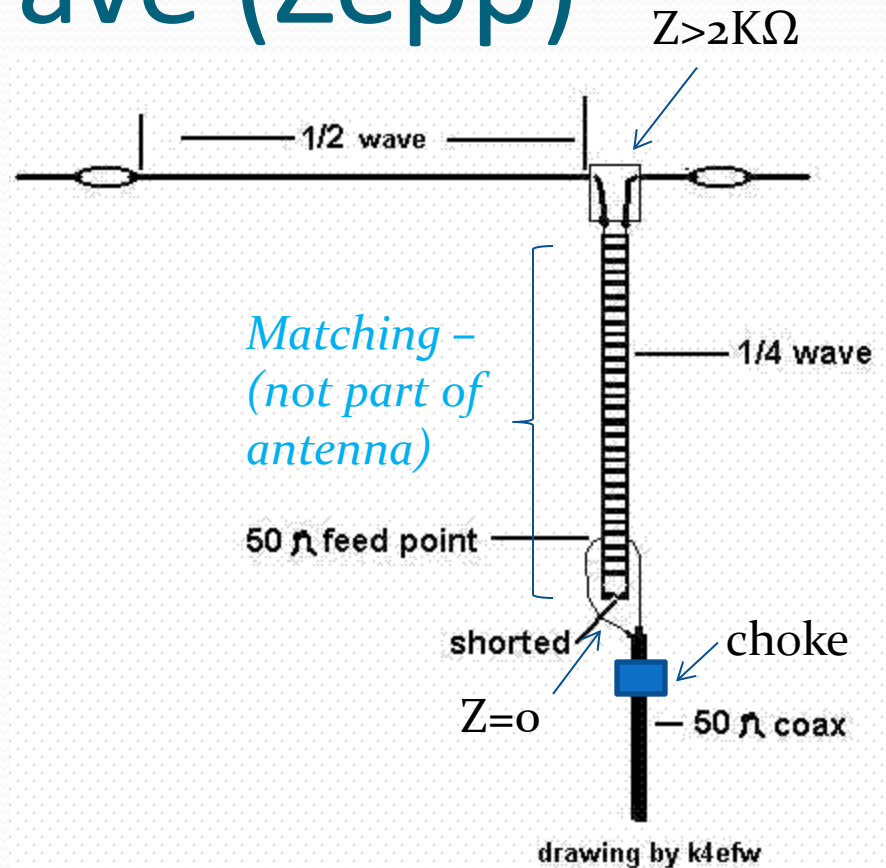

examples

EFHW Zepp Antennas



HF

R5,R7,R9



VHF



R5, R7, R9 has matching transformer
and a choke in same box



UHF

EFHW Wire Antenna


End Fed Half Wave (EFHW)

- Pros

- Multi-band – even harmonics (80-40-20-10 cw)
- Hi Z feed = < ground loss %

- Cons

- Long – use coil to shorten, needs tuner for multi-band
- Complex matching unit (49:1 to 64:1 broadband unun, hi Z = high voltage!)
- Needs feedline choke at coax feed point
- Matching unit gets “HOT” with power or non-harmonic bands

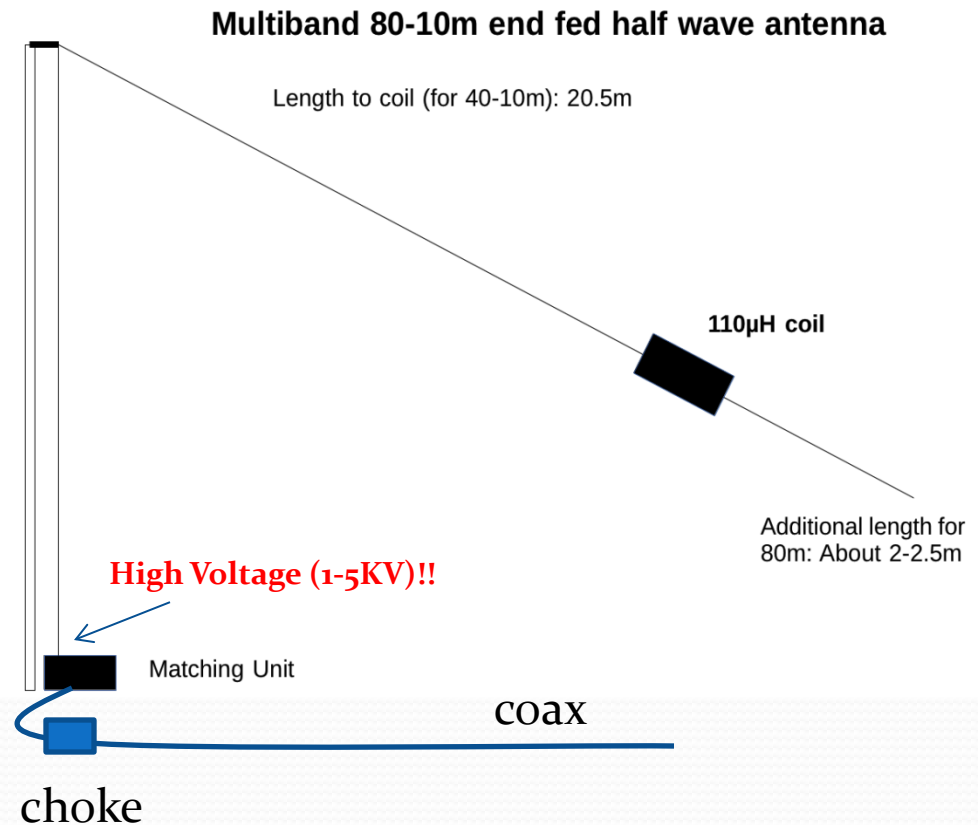


Non-Resonant End Fed Antenna

- Pros

- Shorter length (80 Meters $\geq 71'$, not 130')
- Easy to deploy
- WARC Bands
- Stealth for HOA
- Lots of configurations
- Simple matching, low voltage

- Cons

- Coax radiates
- Counterpoises may be needed on some bands

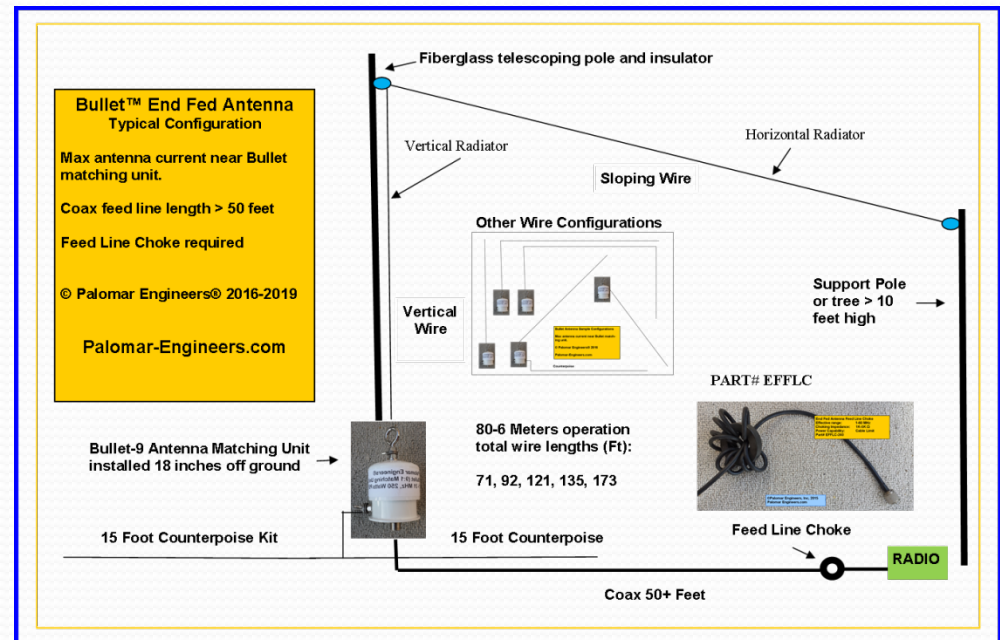

End Fed Antenna Choices Recap

- End Fed Zepp uses ladder line for matching to coax
- End Fed Half Wave – even harmonics, requires special high impedance matching unit, **high voltage** at feed point
- ✓ • Non-resonant end fed is shorter, uses simple matching, low voltage feed point, works many bands with shorter length, in less space and will work in many different configurations

Most Convenient End Fed is the Non-Resonant

Question: So how do you set up a non-resonant end fed?

Secrets of Non Resonant End Fed Antennas

**Bullet™ End Fed Antenna
Typical Configuration**


Max antenna current near Bullet matching unit.

Coax feed line length > 50 feet


Feed Line Choke required

© Palomar Engineers® 2016-2019

Palomar-Engineers.com

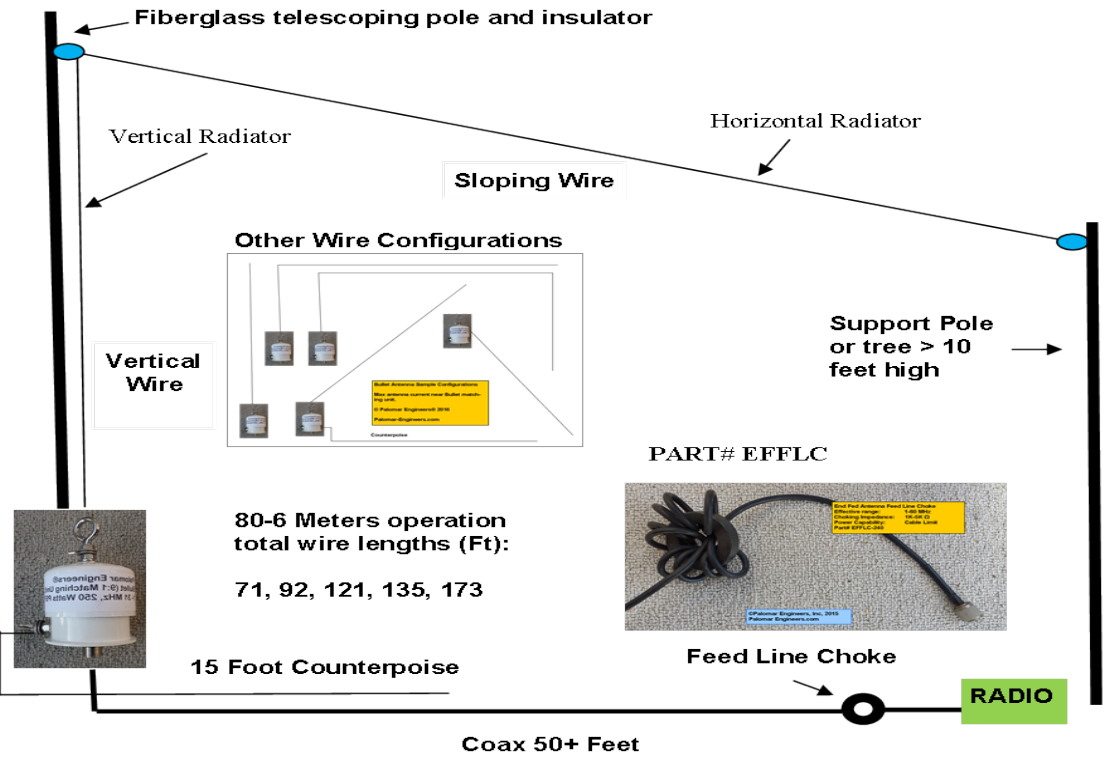

Bullet-9 Antenna Matching Unit installed 18 inches off ground

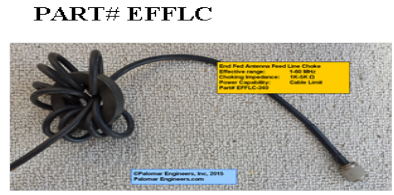

NREF Antenna Secrets

- 1** • **How to determine the wire length to use**
 - (antenna, coax and counterpoise lengths)
- 2** • **How to match the antenna to coax cable**
 - (matching unit values and placement)
- 3** • **Choosing a configuration that fits the location**
 - (vertical, sloper, inverted L, horizontal options, zig-zag)
- 4** ■ **Choosing a feed line choke or noise filter**
 - (selection and installation)

How do these steps apply to your end fed use & location?

How long?

How to determine the wire length


- Antenna Wire – longer for better low band operation
- Coax Cable – typically 50-75% of antenna length
- Counterpoises/radials – use non-resonant length, raised, multiple with various lengths

Suggested wire lengths for 1.8-31 MHz operation (measured from Bullet antenna wire terminal):

Bands Covered (meters)	Wire Length (feet)	Minimum Coax Length (feet)
40-30-20-15	35-43, 49-63, 70-85	35
40-30-20-17	35-45, 54-64, 67-77	35
80-40-30-20-17-15-12-10	38-44, 55, 60, 68-73	50
80-60-40-30-20-17-15-12-10	55, 68-73, 85, 92, 102, 120-125	65
160-80-40-30-20-17-15-12-10	135, 141, 155, 173, 203	100

configs

Typical End Fed Antenna Setup

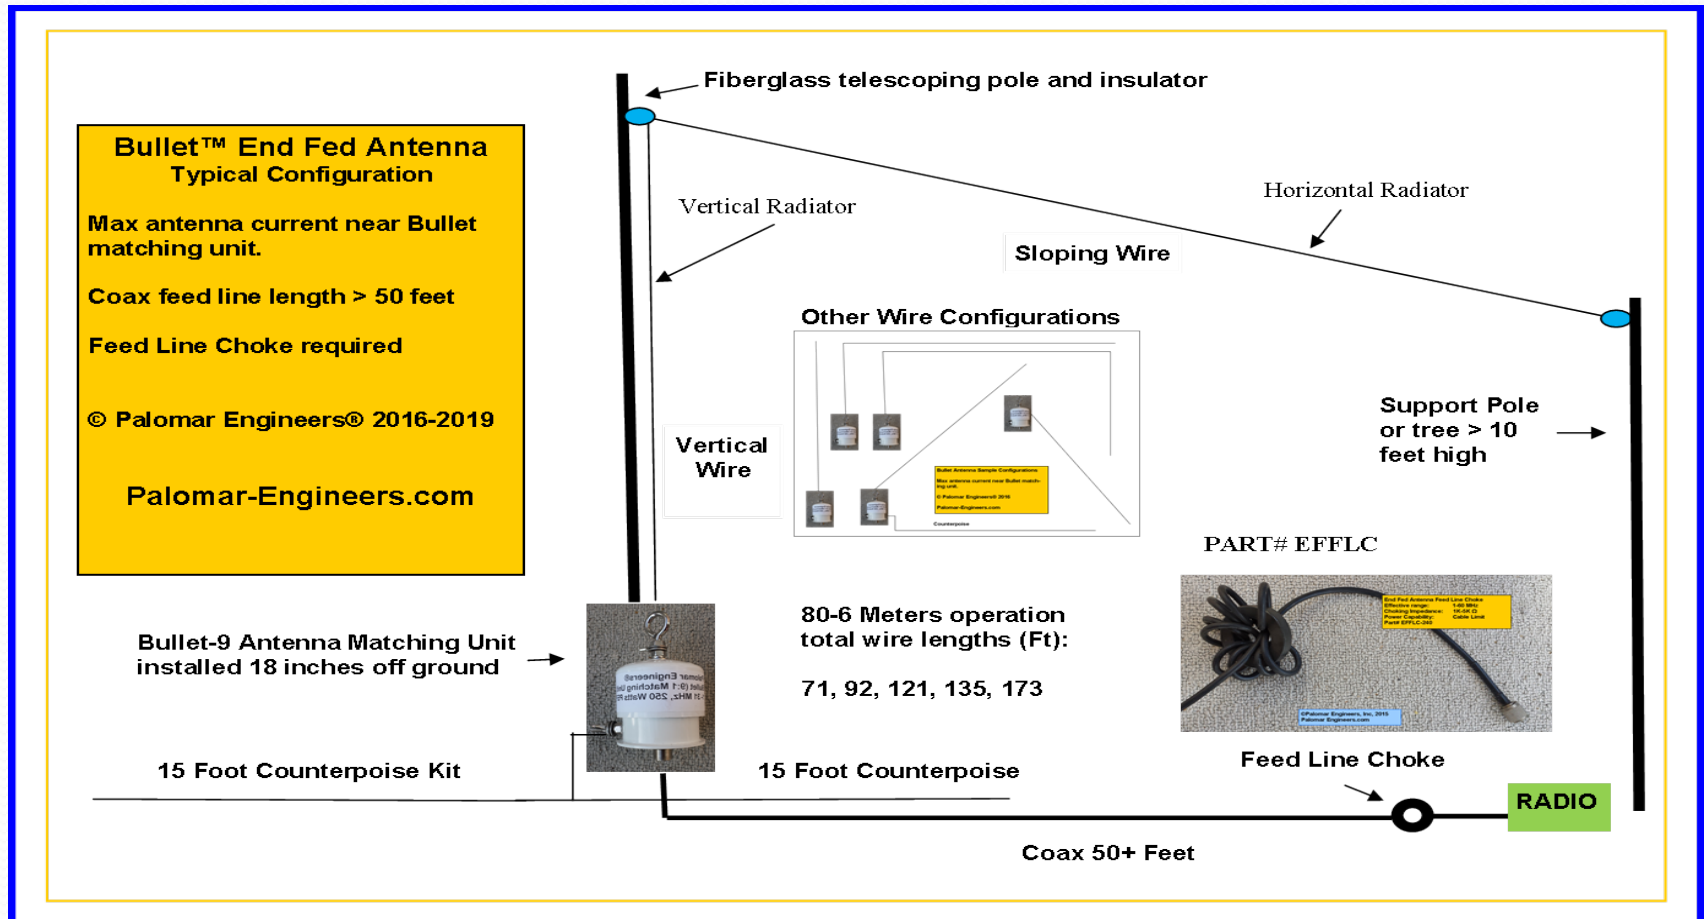

SWR Factors


End Fed SWR Factors

- Configuration shape (Inverted L, flat top, sloper, zig-zag)
- Length of coax feed line – use recommended values
- Feed line choke/noise filter placement – at radio end
- Top feed or bottom feed – feed sloper at top end
- Soil Conductivity – install over/near water
- Length and number of counterpoise(s) – use several with variable lengths, experiment with lengths for bands of interest (no $\frac{1}{4}$ wavelength wires)

Some SWR plots vs antenna length →


Bullet-31'- SWR & Z (after 9:1)

SWR
3:1-->

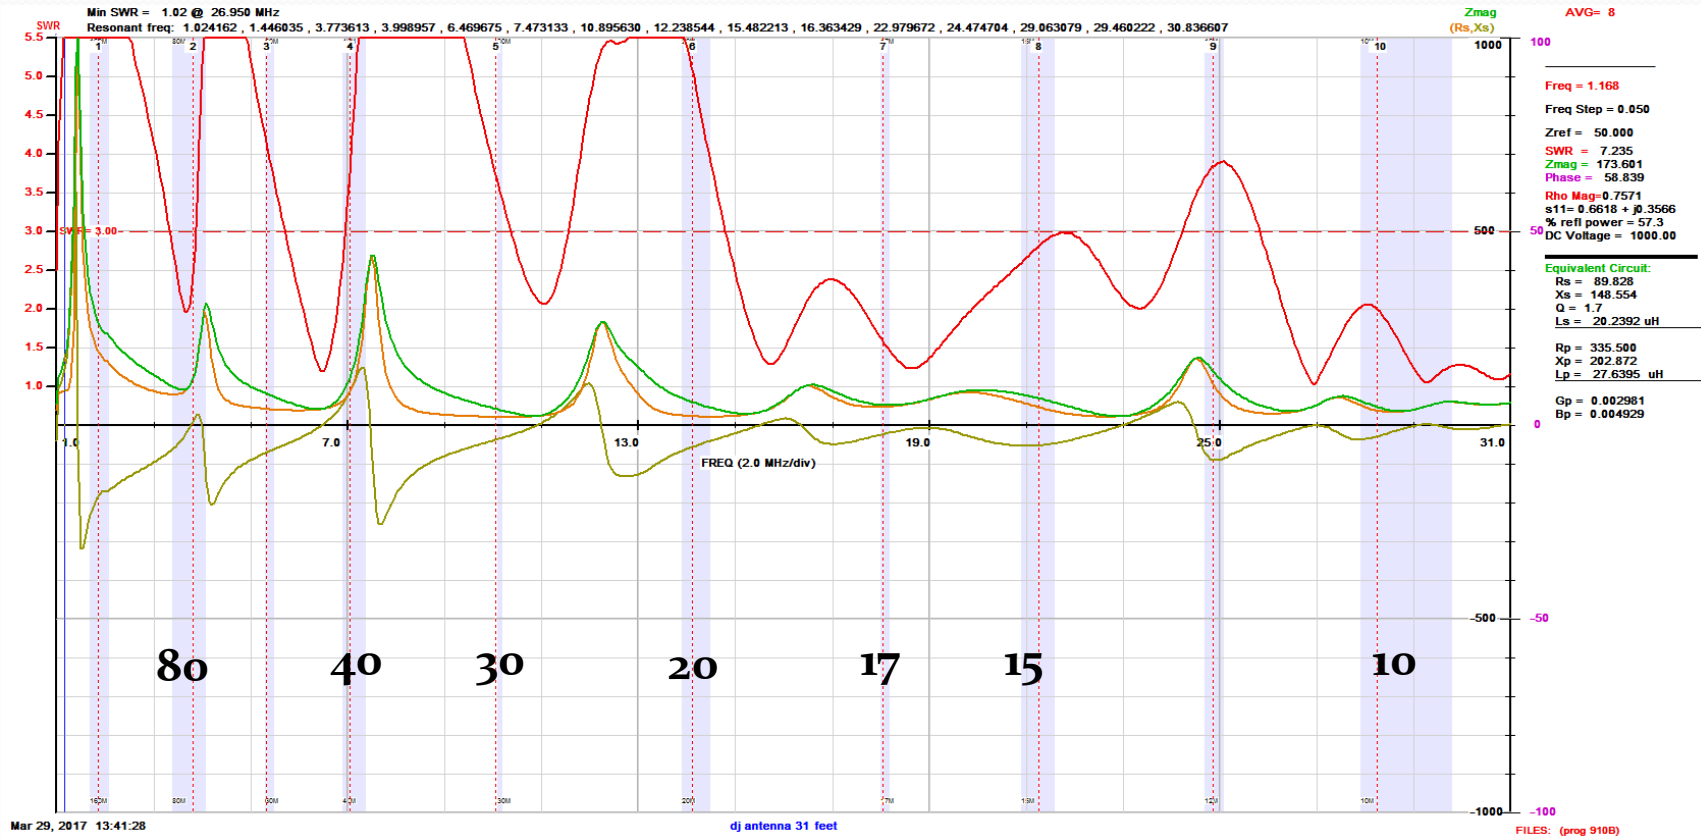

15' vert, 16' horizontal, two 15' counterpoises, use tuner as needed

Bullet-55'- SWR (after 9:1)

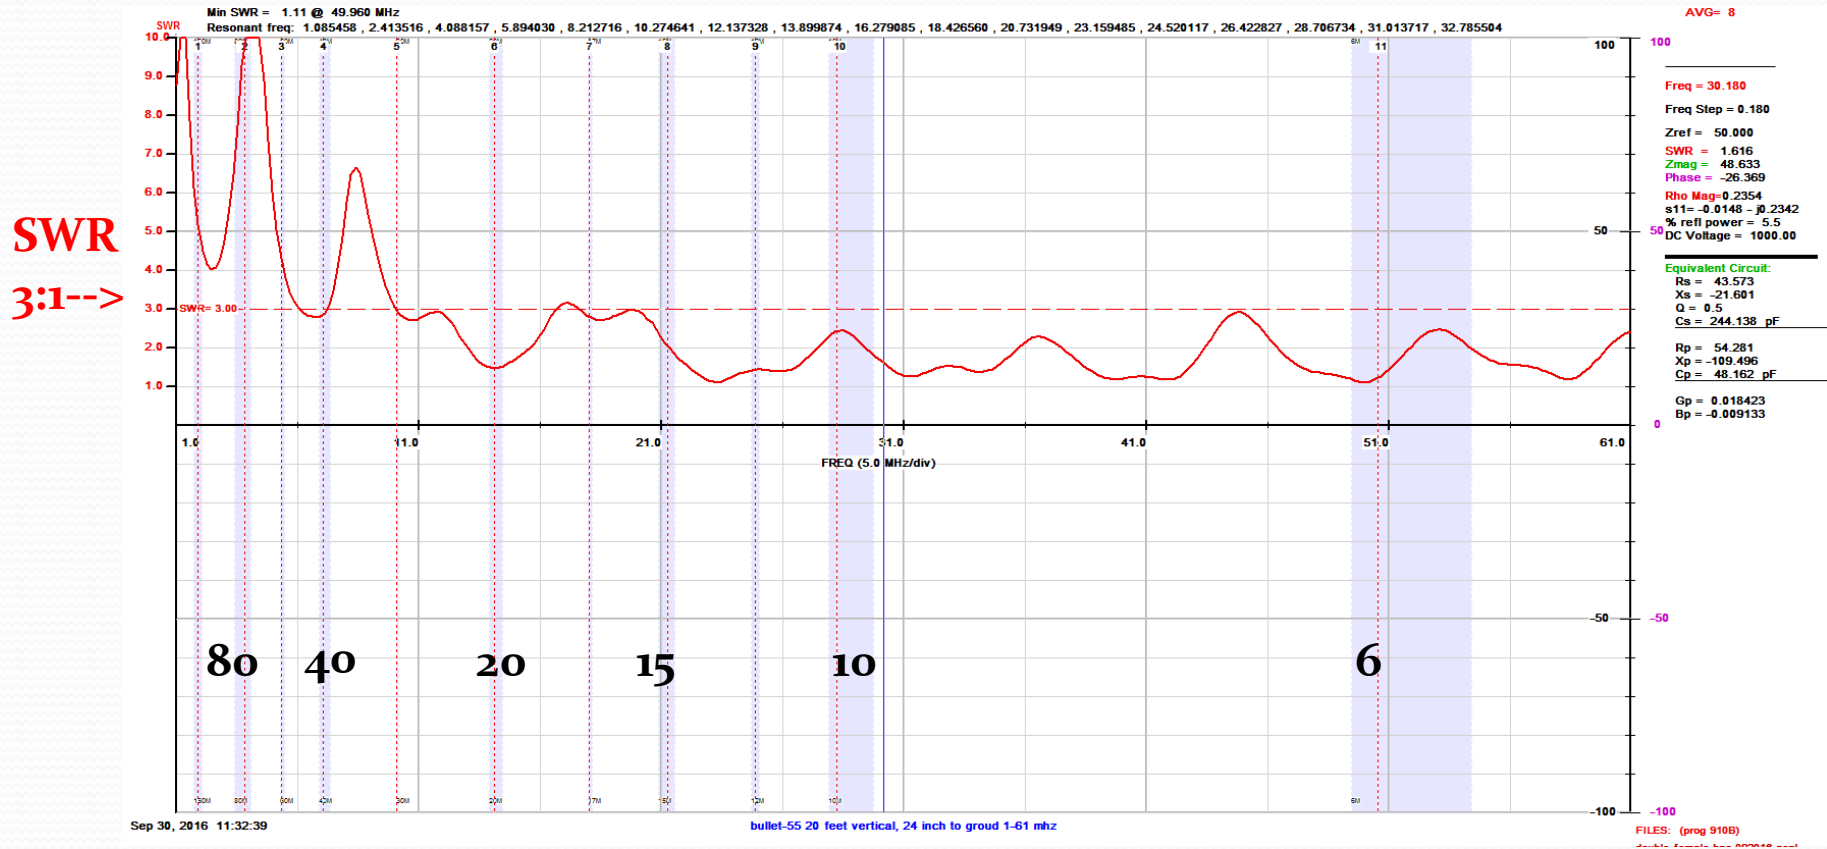


20' vertical, 35 horizontal, two 15' counterpoises, 1-61 MHz. <3:1 40-6 meters

Bullet 71 – most popular for portable, fixed, expeditions


20-25' vertical on fiberglass pole/tree, out 52 feet to 10' or higher pole. 100 feet coax, choke at 43 foot, use tuner for 80 meters

SWR = 2:1 →

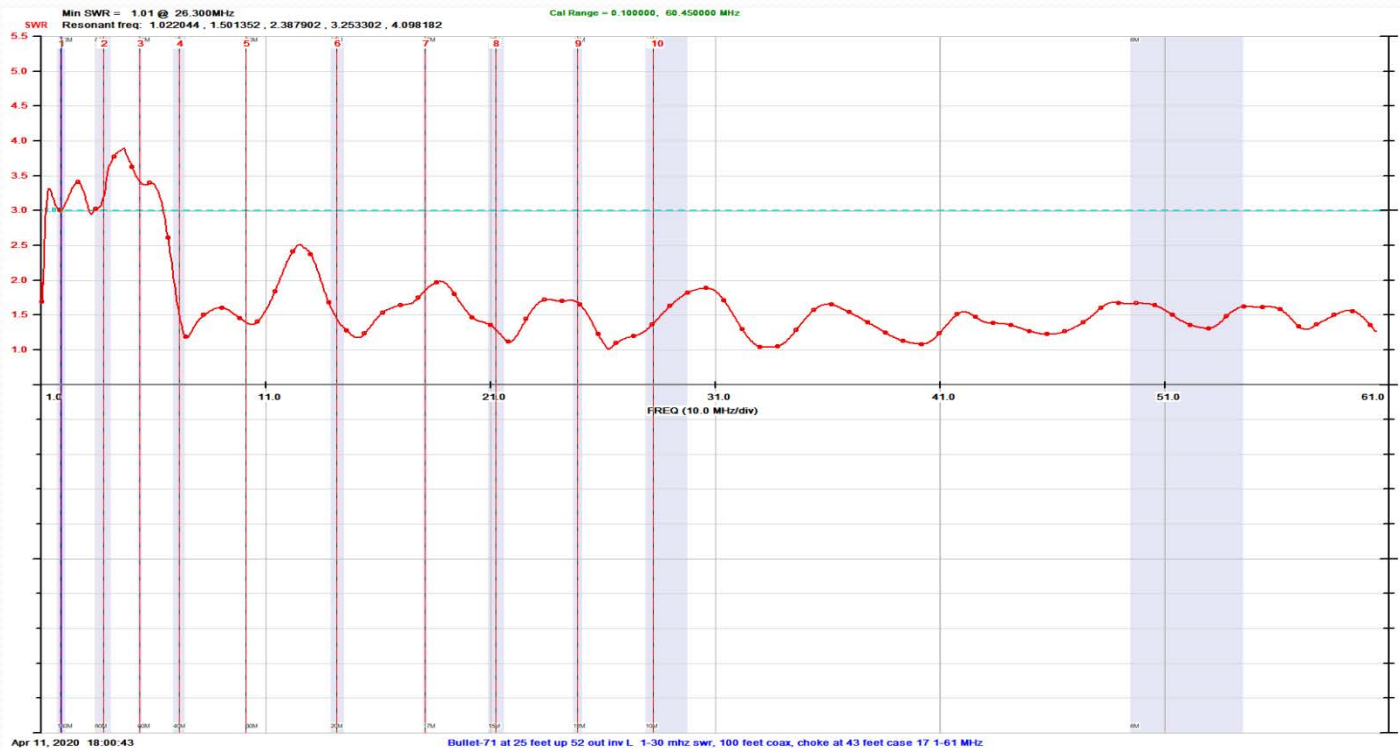


Bullet 77 – HOA Special

Installed 8" on fiberglass pole out to a fence, 50 feet coax with choke at radio end of coax, two 15' counterpoises on ground. Can use house eaves also for horizontal

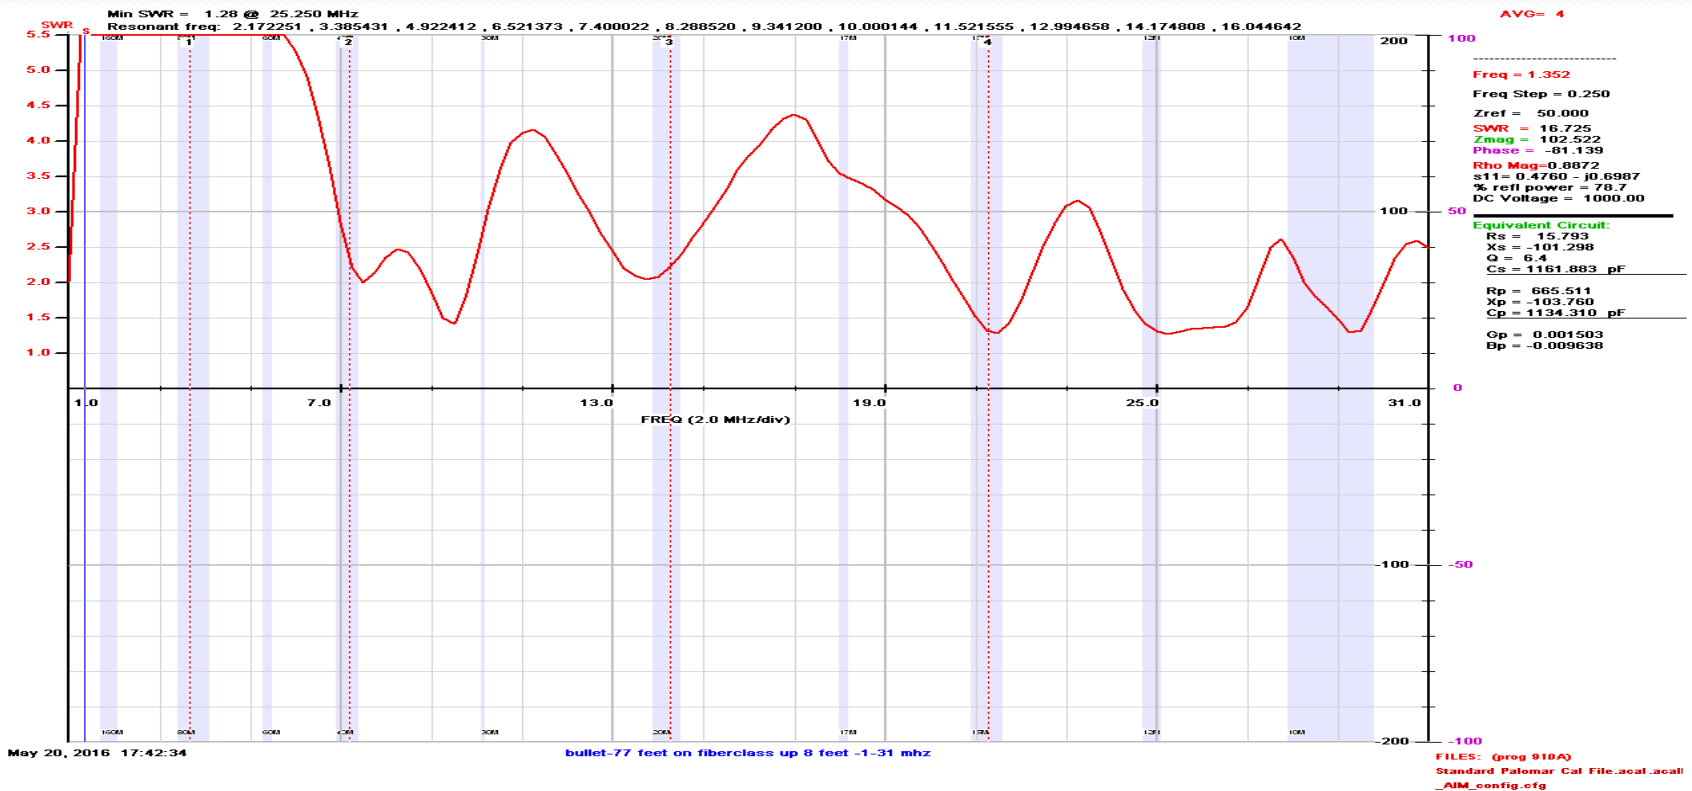

Bullet-92'- SWR & Z (after 9:1)


SWR
2:1-->

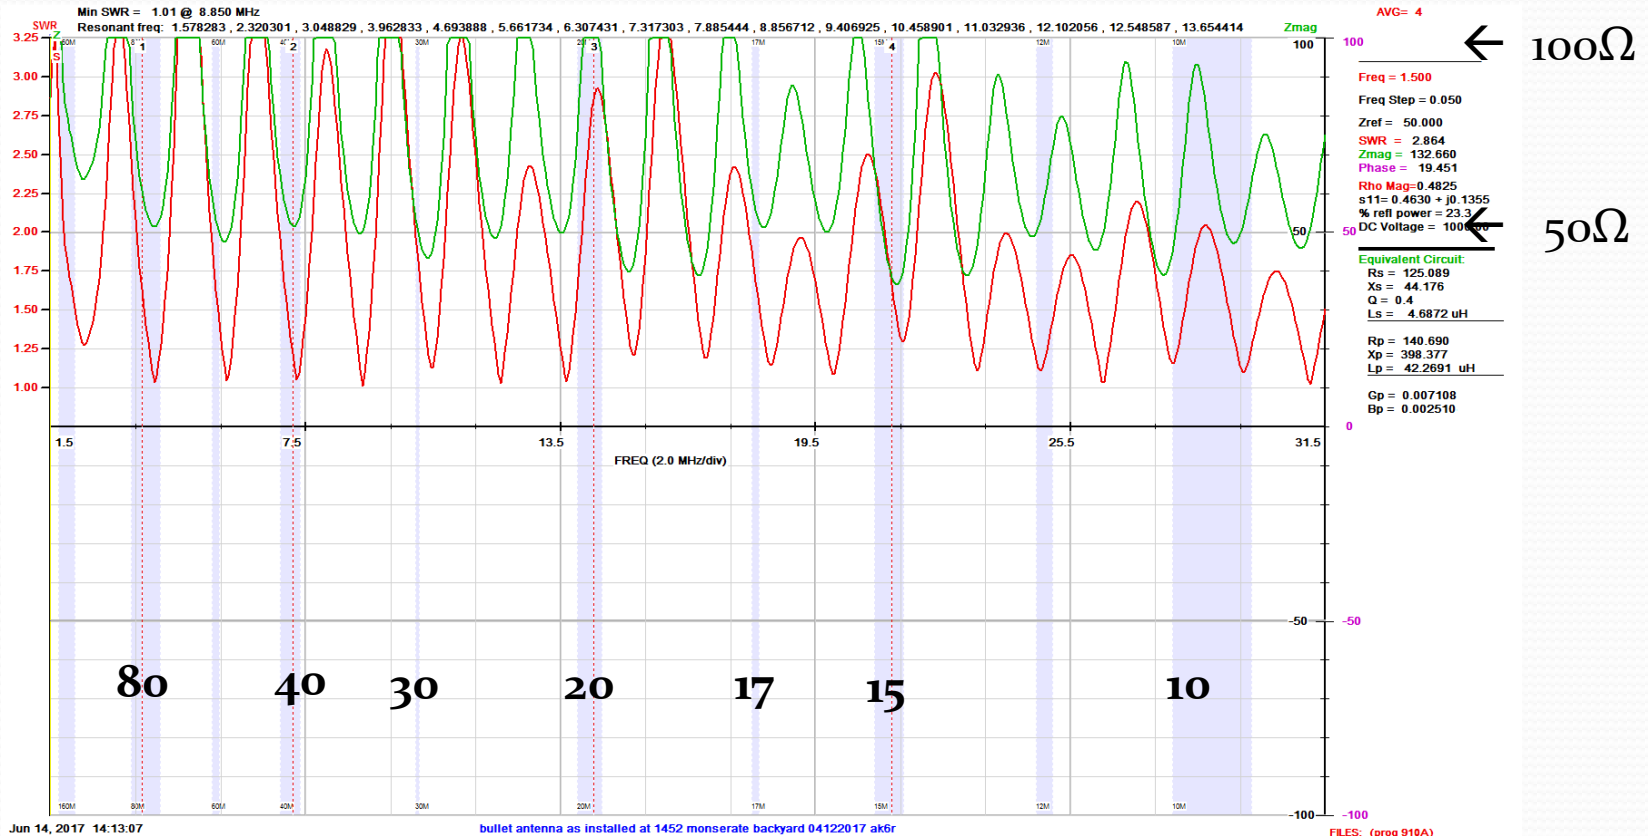

20' vertical, 72' horizontal, two 15' counterpoises, 24" to nail in ground, 1-31 MHz


Bullet 110

Bullet 110 Inverted L (vertical 25', horizontal 85', Bullet-9U (2 feet above ground) – 100 Feet coax, choke at 57 feet from antenna feed point only – two 15' counterpoises wires. Total antenna length = 110 + 57 = 167 feet. Feed point at 110/167 = 65.9% of total length.

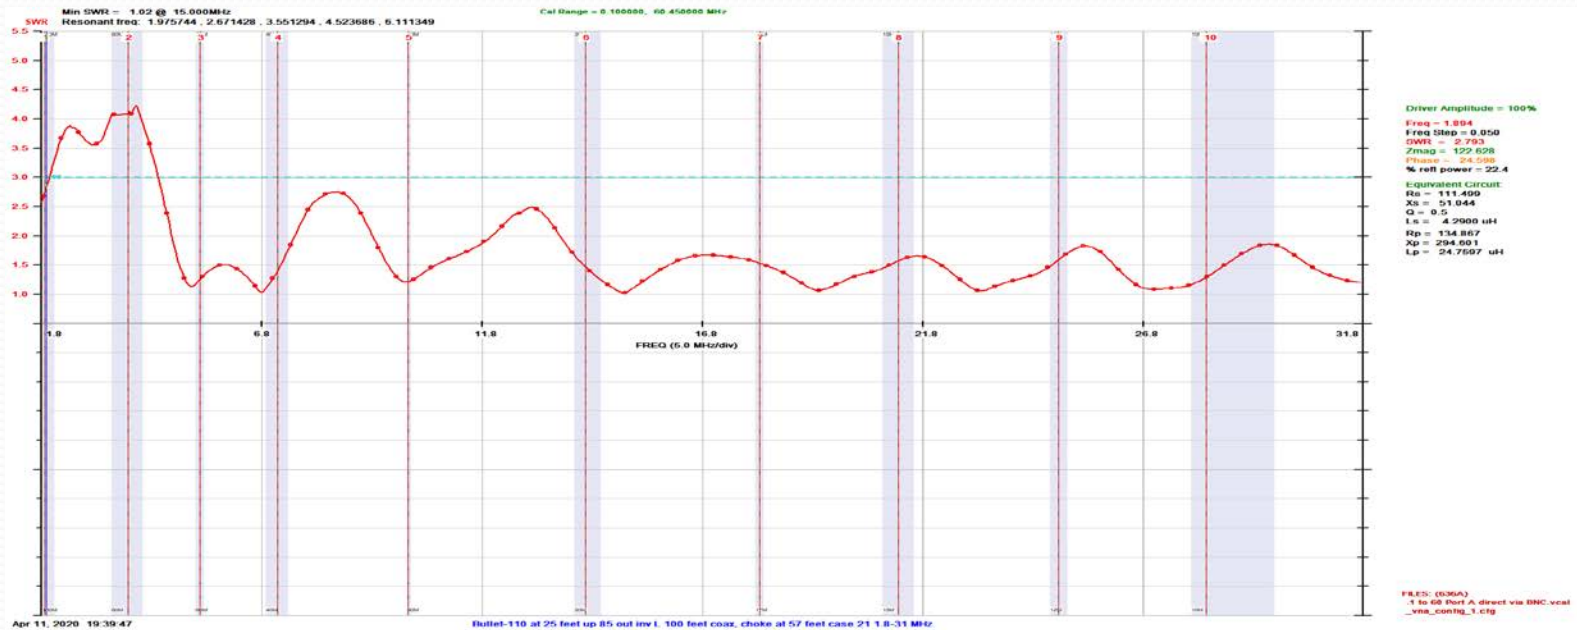


Bullet 148

Bullet 148 Inverted L (vertical 25', horizontal 123', Bullet-9U (2 feet above ground) – 100 Feet coax, choke at 64 feet from antenna feed point only – two 15' counterpoise wires. Total antenna length = 148 + 64 = 212 feet. Feed point at $148/212 = 69.8\%$ of total length.

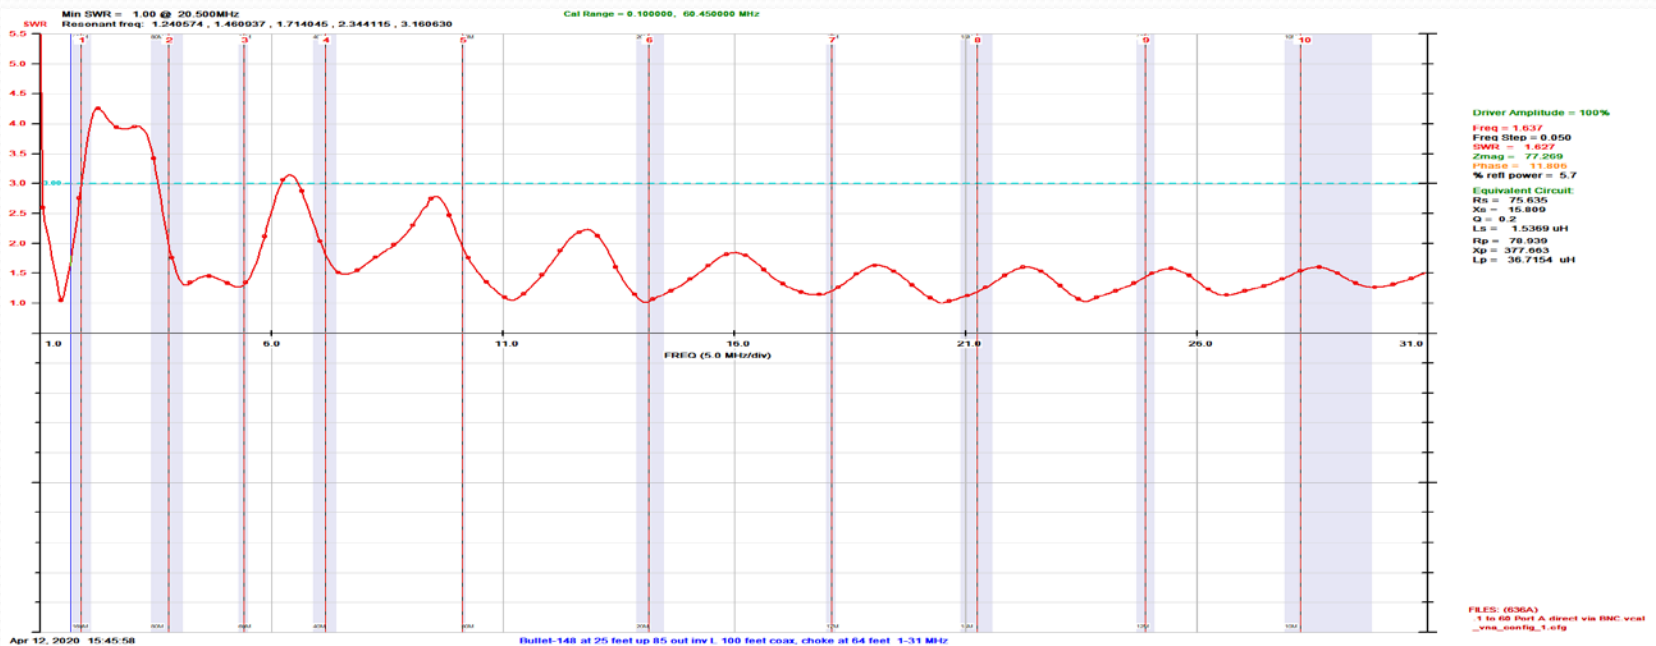

Bullet 155

Bullet 155 Inverted L (vertical 25', horizontal 130', Bullet-9U 2 feet above ground) – 100 Feet coax, choke at 70 feet from antenna feed point only – no counterpoises wires. Total antenna length = 155 + 70 = 225 feet. Feed point at 155/225 = 69% of total length. 160-6M

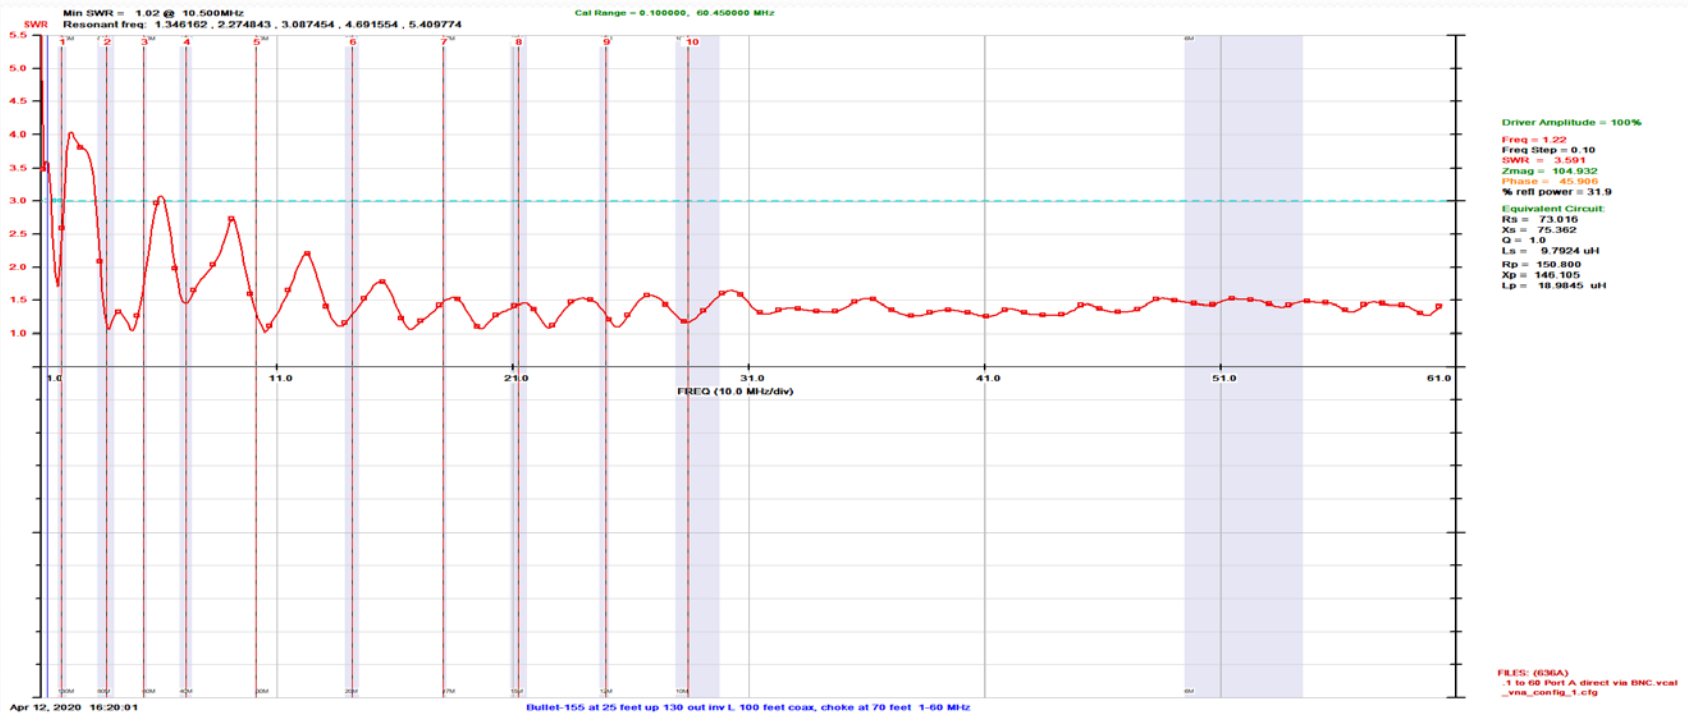


End Fed Antenna Notes

General Notes

For antennas over 92 feet, use 100 feet coax minimum and place choke in a position such that the total antenna wire is 70% of the effective length of the antenna. This choke position will be a good starting point for tuning your antenna on the bands you want to operate. Here are some examples of antenna wire and choke placement (units are in feet):

Antenna Wire length (70%)	Antenna feed point to choke length (30%)	Total Antenna Wire + coax length
102	44	146
110	47	157
125	54	179
135	58	193
148	63	211
155	66	221
173	74	247
203	87	290
218	93	311
268	115	383


	End Fed Feedline Chokes	
EFFLC (RG-8X coax not included)	Mini-Choker MC-1-500-50 (500 watts PEP)	Maxi-Choker MC-1-3000 (3KW PEP)

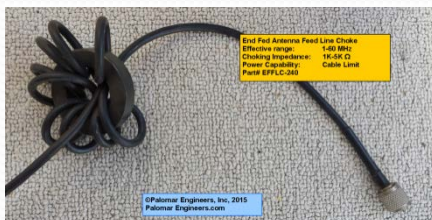


Matching

Matching the end fed antenna to coax cable


- UNUNs are your friend
 - Antenna feed point impedance: $300\text{-}900\Omega$
 - 9:1 transformer gives 33 to 100Ω at coax
- Connections for coax, antenna feed point and counterpoise
- Power Ratings – PEP to match your station

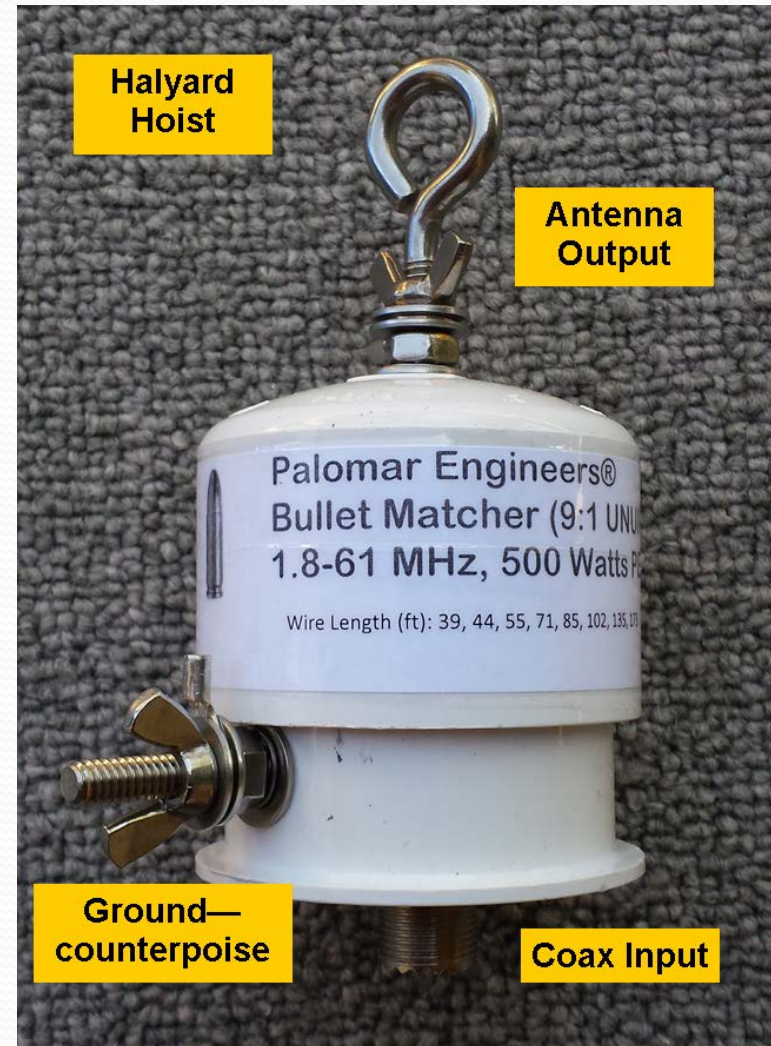

9:1 Ununs – high power

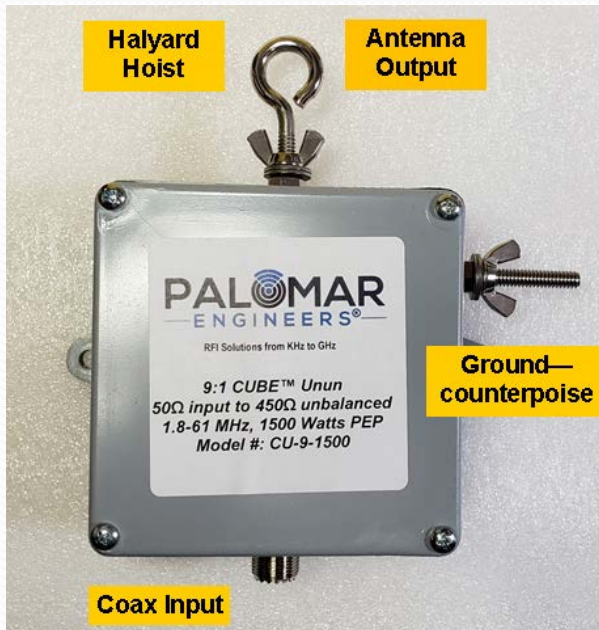

9:1 Cube - 1500 Watts PEP

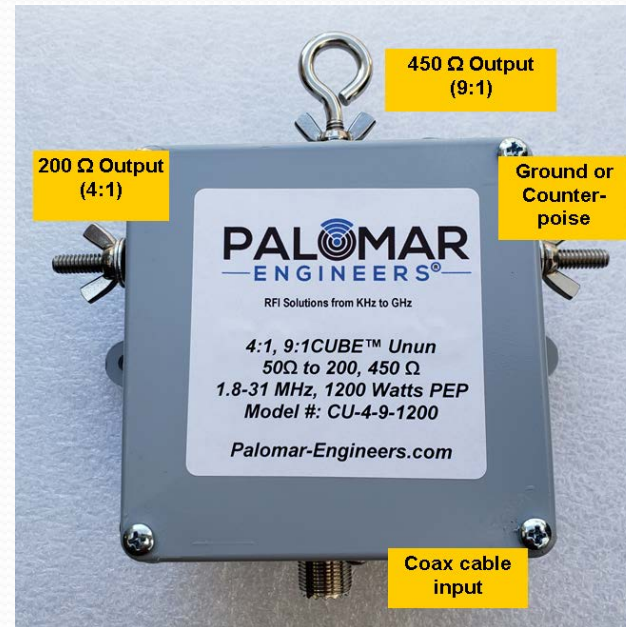

4:1, 9:1 Cube - 1200 Watts PEP

Feedline chokes

Coax Feed Line Chokes and Noise Filters


Lower noise floor = Higher SNR = More DX!



Typical Coax Fed Antenna System

Applies to center fed, off-center fed antennas

Coax outside braid radiation and noise reception

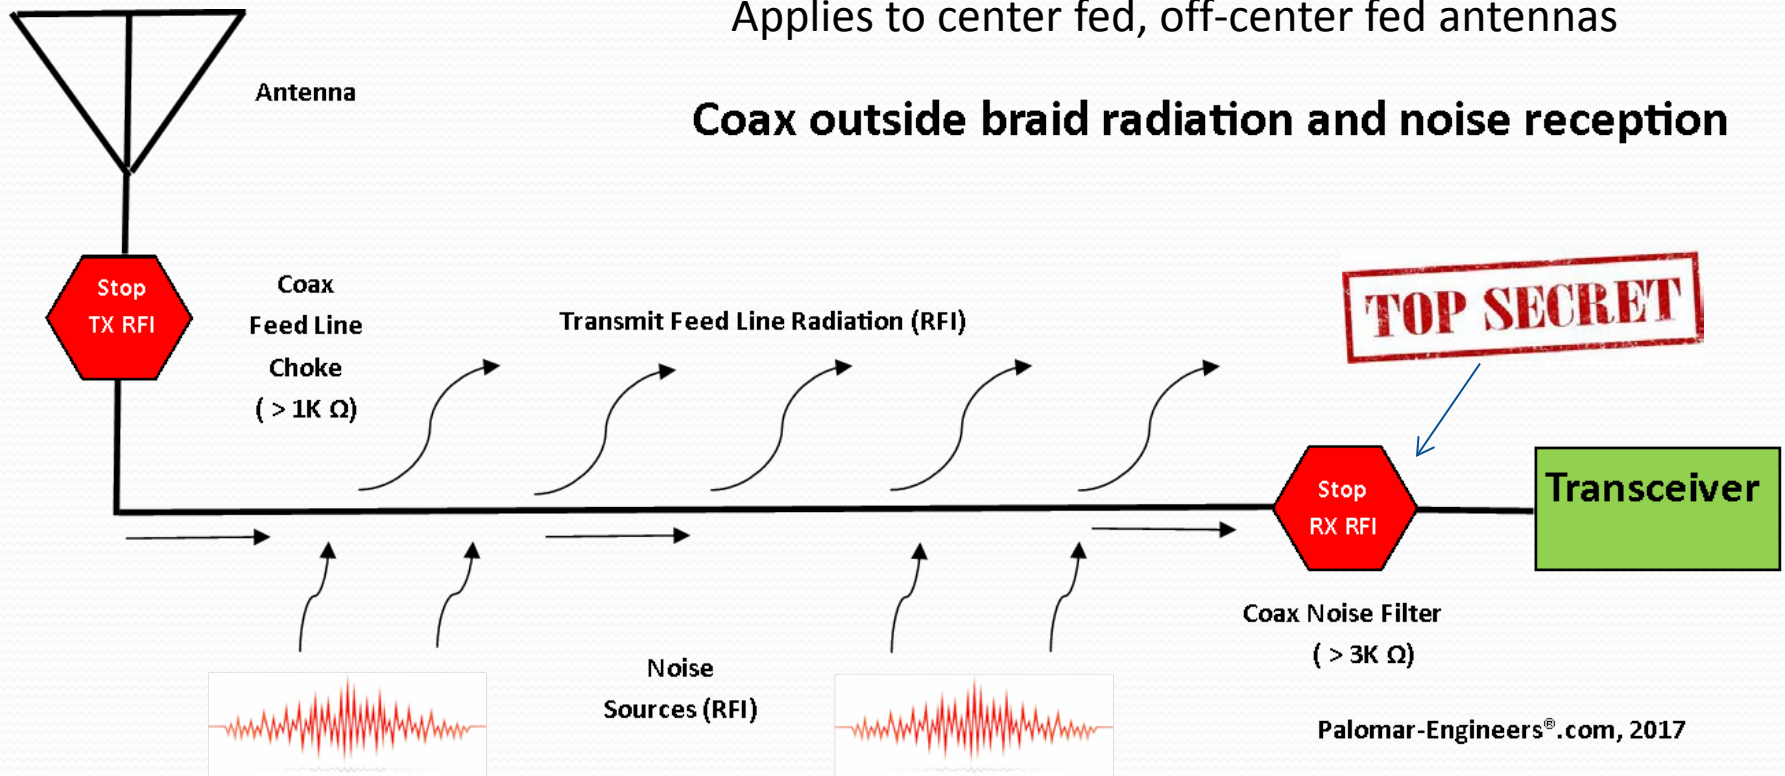

How the end fed antenna is different

Choosing an End Fed Coax Choke



Snap On Choke
500-1000 Ω



Ring Choke
1K-4K Ω





Noise Filter
2K-10K Ω

Criteria to Consider

- Adequate Choking Impedance (Z) > 500 Ω
- Effective Frequency Range where $Z > 500 \Omega$
- Sufficient Power Rating (PEP, Digital)
- Physical Size/Weight

First: Impedance

Choose choking impedance > 500Ω at frequency of use

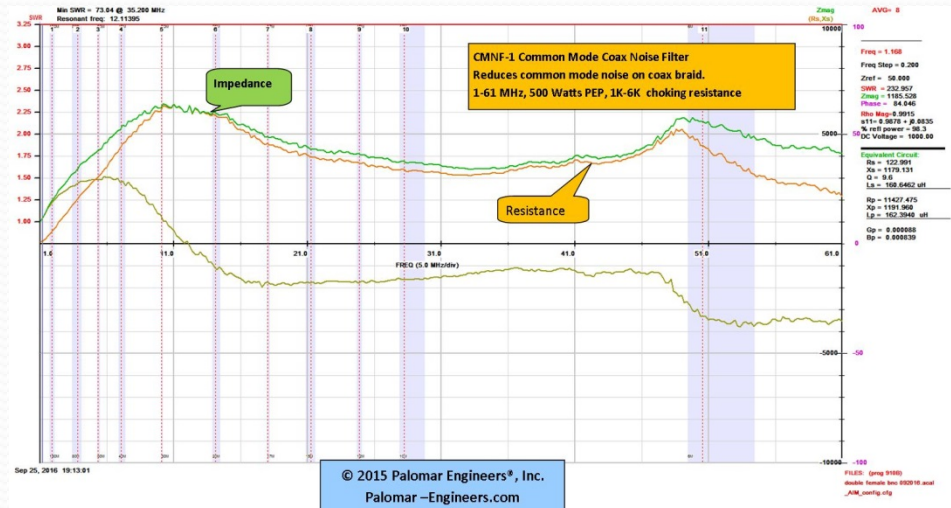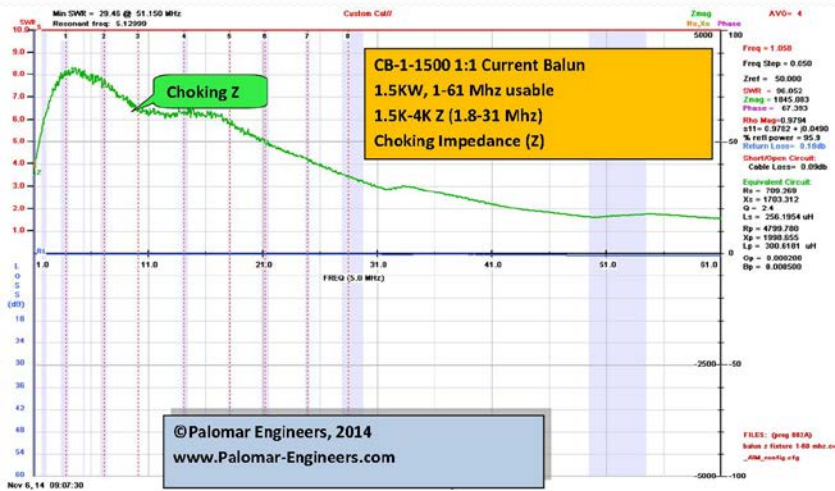

Ferrite Ring
3-60 MHz >500 Ω
500 Watts PEP
1K-4K Ω
1/2 pound, fragile



Coax Noise Filter
.1-150 MHz >2K
500 Watts PEP
1K-6K Z - 50Ω
1/2 pound, rugged



Choking R to dB attenuation

Choking Impedance vs Attenuation

- Palomar Engineers specify RFI/EMI chokes in terms of impedance (in/out), but often the customer needs to know the attenuation to choose which product best suits the application. (1 “S” unit = 6db)

Choke Impedance	Attenuation (dB)
200	-9.5
500	-15.6
1000	-20.8
1500	-24.0
3000	-29.8
5000	-34.2
10000	-40.0

Bullet Antenna Systems



Part# BAS-71




Bullet™ Antenna System with:
71 Ft End Fed Antenna (80-6M) +
Dual Wire Counterpoise Kit +
End Fed Feed Line Choke

\$120

Many more options at Palomar-Engineers.com

DIY parts too!

Bullet Antenna Parts for DIY

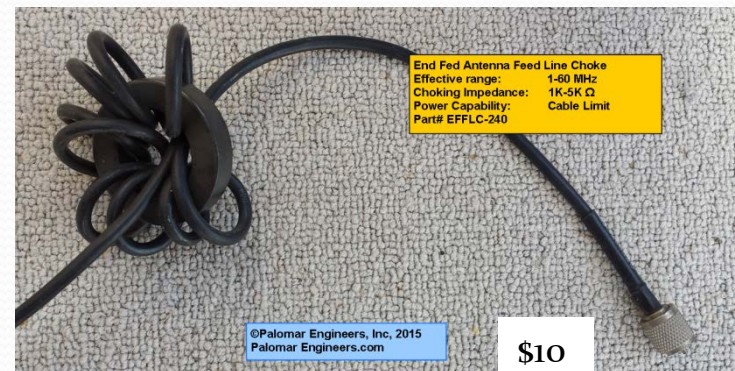

What about antenna RFI Issues?

Solving End Fed Antenna RFI Problems

Stop Transmit RFI
Reduce Receiver RFI noise



GOT WANA?



RFI Solutions from KHz to GHz



WORKED ALL NEIGHBORS

AWARDED TO

Amateur Radio Station _____

Who has caused persistent Radio Frequency Interference (RFI)
to neighbors adjacent to the radio station

Awarded this ____ day of _____, 20__

RFI Case Endorsements:



Bob Brehm, AK6R
Chief Engineer


Typical RFI Solutions

- Keep antenna (and coax) away from house wiring including AC power, Cable/Satellite feeds, telephone lines as these wires can act as receive “antennas” and overload attached electronics OR these “antennas” can transmit spurious signals (and noise) to your antenna and coax giving a high noise floor.
- Use Palomar RFI kits to solve RFI interference or noise issues in your own home or neighbor’s. See website for specific electronic device details.

Transceiver/Amp RFI Kits

Palomar RFI kits for all brands of transceivers and amplifiers

Transceiver RFI Kit

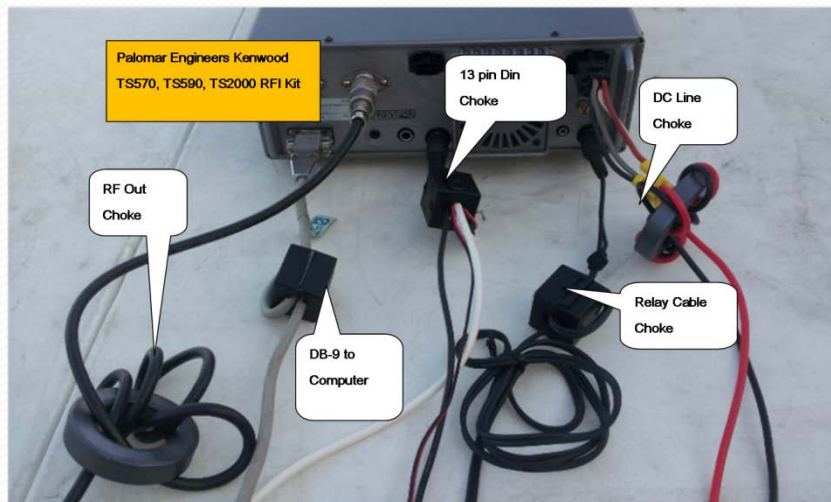

Linear Amplifier RFI Kit



RULE # 1: Clean up your transmitter RFI first!

Neighbor's RFI

Neighborhood RFI Solutions

MY HOME or NEIGHBOR'S HOME



ALARM SYSTEM RFI



HOME THEATER RFI



COMPUTER RFI



MISCELLANEOUS RFI



GARAGE DOOR



TELEPHONE/DSL RFI

Recommendation: Use RFI kits for specific problems, have neighbor purchase and install – do not make mods to neighbors equipment! MOST problems are RFI picked up by AC power/phone lines so ferrite filters work well.

QUIZ TIME

Prize Question #1

- What characteristics of a non-resonant end fed antenna make it superior to a half wave end fed antenna?
 - A) Non-resonant will work on even and odd harmonic frequencies
 - B) Half wave has complicated matching unit with high voltage, non-resonant has simple matching and lower feed point voltage
 - C) Non-resonant can work the WARC bands
 - D) All of the above
 - E) None of the above
 - F) Some of the above
 - G) I have no idea - I was asleep during the talk

Prize Question #2

Where do you place the feed line choke on a non-resonant end fed antenna?

- A) right below the matching unit to choke off all coax shield radiation
- B) at the radio end of the coax - about 30% of coax + antenna wire length
- C) in the middle of the coax length to balance the radiation
- D) between the antenna tuner and the transceiver
- E) end fed antennas don't need feed line chokes

Prize Question #3

TOP SECRET

- What is one of the best kept secrets in ham radio?
 - a) Ladder line has more loss than coax
 - b) An antenna has to be resonant in the ham bands to radiate in the ham bands
 - c) All ferrites work on all frequencies, so buy the cheapest
 - d) Coax noise filters reduce common mode noise level in your receiver so you can hear more stations
 - e) All extra class hams go to heaven

OK, 1 more!

Bonus Prize Question #4

- Which company is your best source for End Fed Antennas and RFI solutions?

RFI Solutions Experts



RFI Solutions from KHz to GHz

- Website: www.Palomar-Engineers.com
- Email: Sales@Palomar-Engineers.com
- Phone: 760-747-3343
- Bob Brehm, AK6R – Chief Engineer
- This presentation available on the website.